



MF20



MF63



MF25



MF632P

Type	rating	cat. no.
2P NO	20A	MF20
4P NO	25A	MF25
2P NO	63A	MF632P
4P NO	63A	MF63
2P NO, 2P NC	63A	MF63S
4PNC	63A	MF63-4C

Technical Data

Electrical


Design according to	IEC 60947-4-1 & IEC 61095
Rated voltage (Ue)	230V / 400V~, 240V / 415V~
Coil voltage (Us)	240V~
Coil Insulation	Class E

Mechanical

Terminal capacity	1-6mm ² (MF 20, MF25) 1-16mm ² (MF40, MF 63)
-------------------	---

Mounting installation	DIN rail EN 50022
-----------------------	-------------------

Dimension (mm)

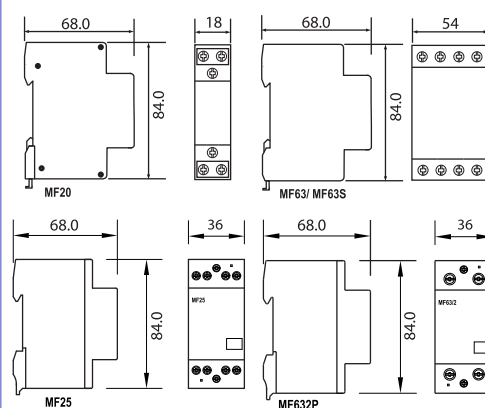

Surge Protection Device (SPD)

1P+N mode Protection - MY2-20MAX

Type / Cat. No	Width
1-Phase SPD MY2-20MAX(1P+N/A) With Auxiliary	2 modules 36mm

Technical Data

Description

- For protection of consumer equipment against transient overvoltages caused by direct or indirect lightning strike and switching operations
- Use in domestic, commercial and light industrial installations


Electrical

Design according to	IEC 61643-11
SPD class	CLASS II, TYPE 2
Uc (~)	320V
Uc (~) [N-PE]	255V
Uoc	<1.5kV
Response time tA	<25ns
State/Fault indication	Green/Red
Structure type	Modular
Degree of protection	IP20
Nominal discharge current, In (8/20μs)	10kA
Max. discharge current, Imax (8/20μs)	20kA

Mechanical

Terminal capacity	2.5 – 25mm ²
Mounting installation	DIN rail EN50022

MY2-20MAX(1P+N/A)

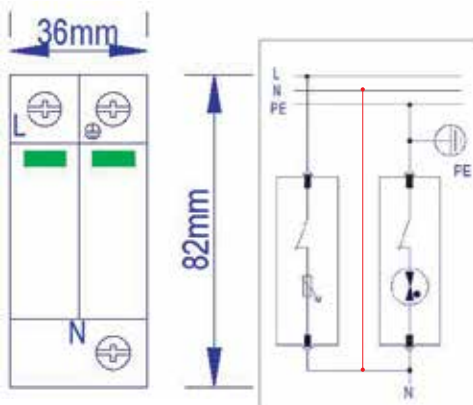

NOTE:

- *COMPETENT PERSON NEED TO CHECK FOR DAMAGE OR OPERATED SPD MODULES FOR REPLACEMENT.
- *ALL CABLES CONNECTING TO SPD SHALL NOT BE LESS THAN 6MM².