

Standard ready to use Metal DB enclosure (Consumer Unit)

Fitted with Incomer & RCCB

Fitted with SWITCHFUSE Incomer & RCCB (DB-SPS & TPS Series)



Technical Data






Design according to IEC 60439-3
Material 1.0mm mild steel
Degree of protection IP30
Finishing Light grey colour with oven baked epoxy powder paint (RAL7035)

Fitted with one set neutral and earth link
With wiring and busbar
Fitted with Switchfuse incomer & RCCB.



Fitted with Switchfuse Incomer & RCCB

type	no. of row	way / row	mod. way	SW. FUSE	RCCB	cat. no
32A SPN	1	10	10	32A	40/0.1	DB10WSPS32
32A SPN	1	16	16	32A	40/0.1	DB16WSPS32
63A SPN	1	10	10	63A	63/0.1	DB10WSPS63
63A SPN	1	16	16	63A	63/0.1	DB16WSPS63
32A TPN	3	9	27	32A	40/0.3	DB9WTPS32
32A TPN	3	12	36	32A	40/0.3	DB12WTPS32
32A TPN	3	18	54	32A	40/0.3	DB18WTPS32
63A TPN	3	9	27	63A	63/0.3	DB9WTPS63
63A TPN	3	12	36	63A	63/0.3	DB12WTPS63
63A TPN	3	18	54	63A	63/0.3	DB18WTPS63

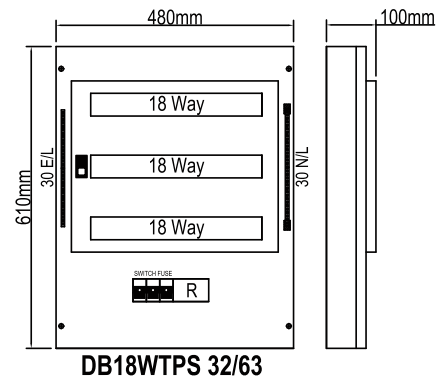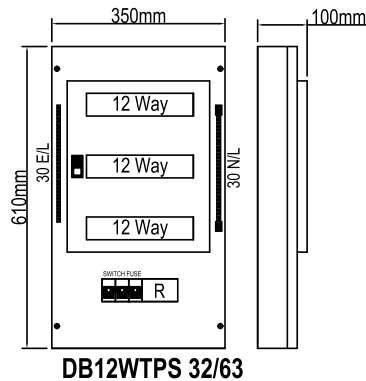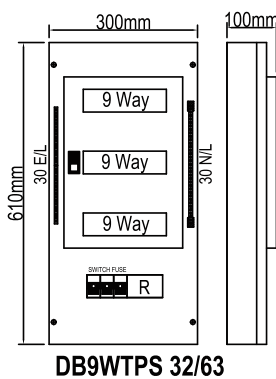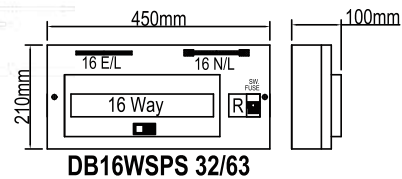

E/L - Earth Link
N/L - Neutral Link
R- space for RCCB