
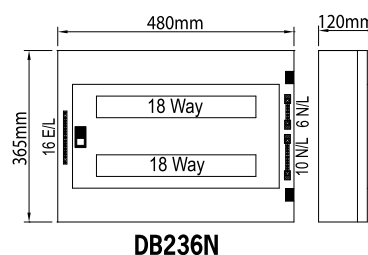

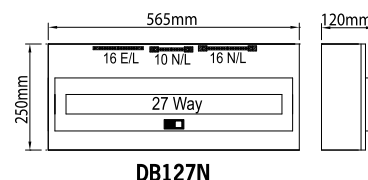




Metalclad DB enclosure (consumer units)

DB Suitable to fit Isolator, switchfuse, MCB as Incomer (DB-N Series)













type	no. of row	way / row	mod. way	H (mm)	W (mm)	D (mm)	cat. no
12 way	1	12	12	210	295	105	DB112N
18 way	1	18	18	210	400	105	DB118N
22 way	1	22	22	210	472	105	DB122N
27 way	1	27	27	250	565	120	DB127N
32 way	2	16	32	365	420	120	DB232N
36 way	2	18	36	365	480	120	DB236N
48 way	3	16	48	490	420	120	DB348N
54 way	3	18	54	490	480	120	DB354N
64 way	4	16	64	615	420	120	DB464N
72 way	4	18	72	615	480	120	DB472N
90 way	5	18	90	770	480	120	DB590N
108 way	6	18	108	945	480	120	DB6108N
126 way	7	18	126	1070	480	120	DB7126N
154 way	7	22	154	1070	555	120	DB7154N
144 way	8	18	144	1195	480	120	DB8144N
176 way	8	22	176	1195	555	120	DB8176N

Technical Data

Design according to	IEC 60439-3
Material	1.2mm mild steel (1-6 row type) 1.5mm mild steel (7-8 row type)
Degree of protection	IP30
Finishing	Light grey colour with oven baked epoxy powder paint (RAL7035)

Fitted with one set neutral and earth link.
Without components, wiring and busbar

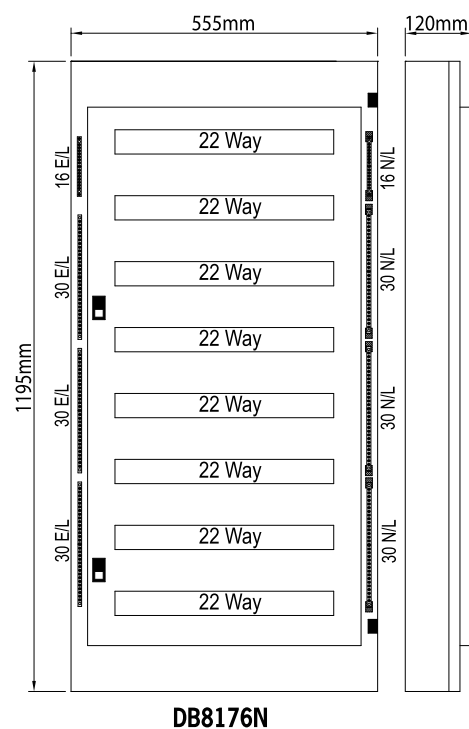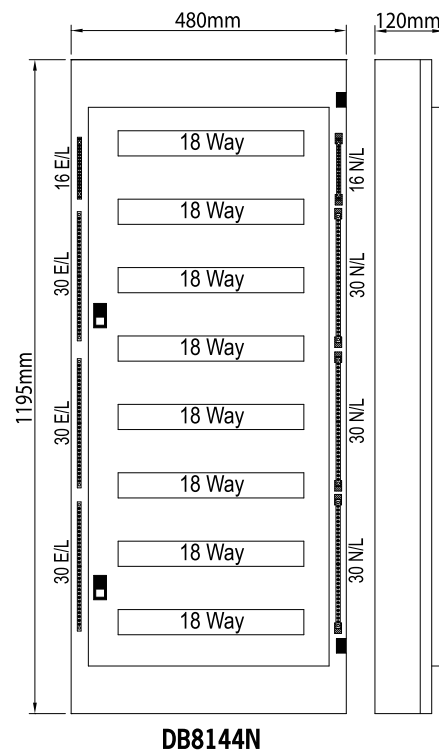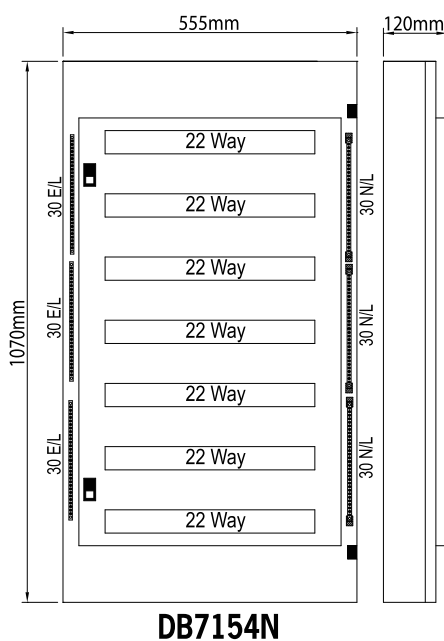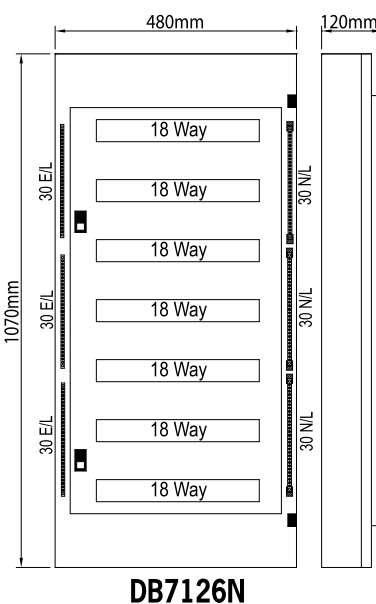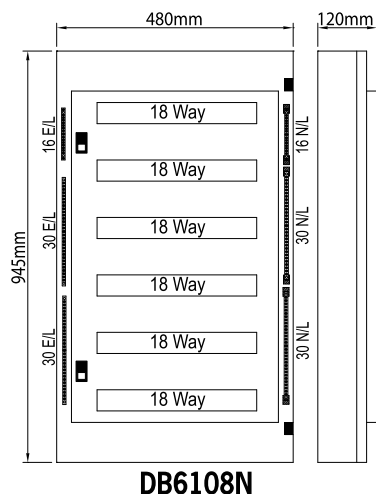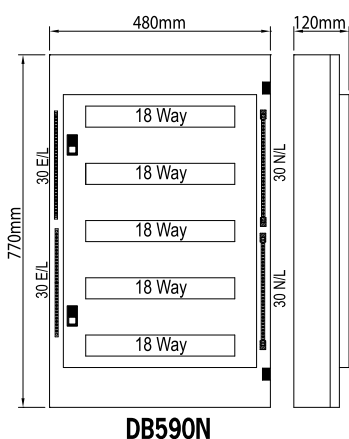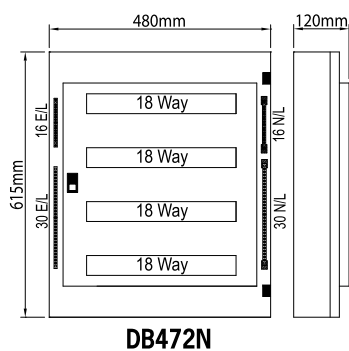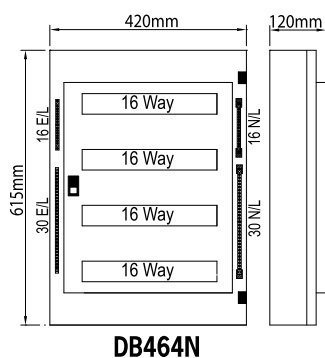

E/L - Earth Link
N/L - Neutral Link