

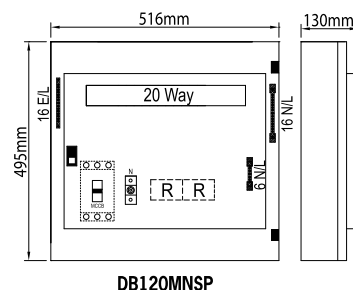


Metalclad DB enclosure (consumer unit)

DB suitable to fit MCCB as incomer (DB-MN Series)



E/L - Earth Link
N/L - Neutral Link
R - space for RCCB



type	no. of row	way / row	mod. way	H (mm)	W (mm)	D (mm)	cat. no
13 way*	1	13	13	250	450	110	DB113MN
19 way*	1	19	19	250	560	110	DB119MN
20 way**	1	20	20	516	495	130	DB120MNSP
32 way**	2	16	32	580	420	130	DB232MN
36 way***	3	12	36	740	350	130	DB336MN
54 way**	3	18	54	740	480	130	DB354MN
72 way**	4	18	72	865	480	130	DB472MN
90 way**	5	18	90	1030	480	130	DB590MN
108 way**	6	18	108	1155	480	130	DB6108MN
126 way**	7	18	126	1280	480	130	DB7126MN
154 way**	7	22	154	1280	555	130	DB7154MN
144 way**	8	18	144	1405	480	130	DB8144MN
176 way**	8	22	176	1405	555	130	DB8176MN

Technical Data

Design according to	IEC 60439-3
Material	1.2mm mild steel (1-6 row type) 1.5mm mild steel (7&8 row type)
Degree of protection	IP30
Finishing	Light grey colour with oven baked epoxy powder paint (RAL7035)

Fitted with one set neutral and earth link.

Without components, wiring and busbar

* with space provision for MCCB only.

** with space provision for MCCB & 2nos. RCCB.

*** with space provision for MCCB & 1no. RCCB.

