
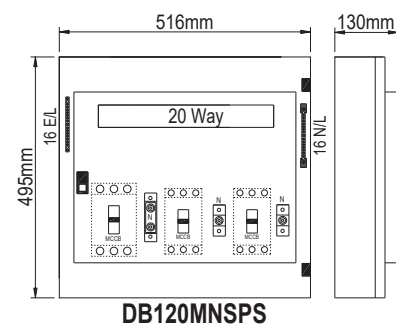


Metalclad DB enclosure (consumer unit)

DB suitable to fit MCCB as incomer (DB-MNS Series)

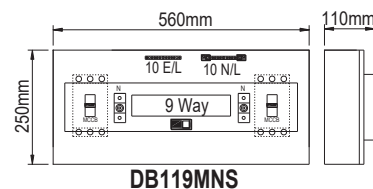

E/L - Earth Link

N/L – Neutral Link

Type	No. of row	way/ row	mod. way	H (mm)	W (mm)	D (mm)	cat. no
13 way	1	13	13	250	450	110	DB113MNS
19 way	1	19	19	250	560	110	DB119MNS
20 way	1	20	20	516	495	130	DB120MNSPS
32 way	2	16	32	580	420	130	DB232MNS
54 way	3	18	54	740	480	130	DB354MNS
72 way	4	18	72	865	480	130	DB472MNS
90 way	5	18	90	1030	480	130	DB590MNS
108 way	6	18	108	1155	480	130	DB6108MNS
126 way	7	18	126	1280	480	130	DB7126MNS
154 way	7	22	154	1280	555	130	DB7154MNS
144 way	8	18	144	1405	480	130	DB8144MNS
176 way	8	22	176	1405	555	130	DB8176MNS

Technical Data

Design according to	IEC 60439-3
Material	1.2mm mild steel (1-6 row type) 1.5mm mild steel (7&8 row type)
Degree of protection	IP30
Finishing	Light grey colour with oven baked epoxy powder paint (RAL7035)
Fitted with one set neutral and earth link.	
Without components, wiring and busbar	

