

# M12.5M | 1P + N

## Type 1+2



### Description

- ▶ Surge protection for **Main Distribution Board (MDB)**.
- ▶ Protection against discharge surge energy.
- ▶ Suitable for TT and TN-S system.



### Applications




### Approval / Marking




### Technical Parameters

Models	M12.5M/1+1	M12.5M/1+1/A
Design according to	IEC 61643-11	Class I+II, Type 1+2
Poles	1P + N	
Nominal operating voltage ( $\sim$ ) $U_n$	230V (50/60Hz)	
Maximum continuous voltage ( $\sim$ ) $U_c$ [L-N/N-PE]	320V/255V (50/60Hz)	
Lightning impulse current (10/350 $\mu$ s) $I_{imp}$ [L-N/N-PE]	12.5kA/50kA	
Nominal discharge current (8/20 $\mu$ s) $I_n$ (L-N)	25kA/50kA	
Maximum discharge current (8/20 $\mu$ s) $I_{max}$ (L-N)	60kA/100kA	
Voltage protection level $U_P$ (L-N/N-PE)	$\leq 1.5kV / \leq 1.5kV$	
Short-circuit current rating ( $\sim$ ) $I_{SCCR}$	25kA	
Maximum disconnecter rating (fuse/MCB)	125A gG/100A	
Temporary overvoltage TOV-withstand $U_T$ (L-N)	400V/5s	
Temporary overvoltage TOV-safe failure $U_T$ (L-N)	520V/120min.	
Temporary overvoltage TOV-withstand $U_T$ (N-PE)	1200V/200ms	
Leakage current $I_{PE}$	None	
Response time $t_A$	$\leq 25ns$	
Operating temperature range $T_u$	$-40^\circ C$ to $+80^\circ C$	
Auxiliary Terminal (Remote Signalling)	None	Terminal 11 & 12: Normally Close [NC] Terminal 11 & 14: Normally Open [NO]
Status / Fault indication	Green/Blue: ok; Red: Replace	
Structure type	Modular	
Enclosure	IP20 ; Thermoplastic UL94-V0	

### Dimensions (mm)

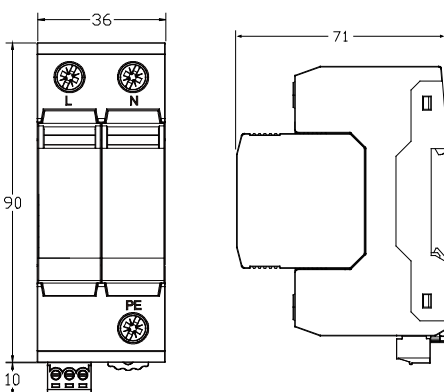

### Schematic

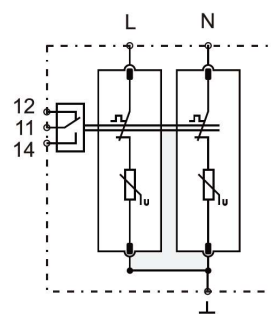

# M12.5M | 3P + N

## Type 1+2



### Description

- ▶ Surge protection for Main Distribution Board (MDB).
- ▶ Protection against discharge surge energy.
- ▶ Suitable for TT and TN-S system.



### Applications




### Approval / Marking




### Technical Parameters

Models	M12.5M/3+1	M12.5M/3+1/A
Design according to	IEC 61643-11	Class I+II, Type 1+2
Poles	3P + N	
Nominal operating voltage ( $\sim$ ) $U_n$	230V/400V (50/60Hz)	
Maximum continuous voltage ( $\sim$ ) $U_c$ [L-N/N-PE]	320V/255V (50/60Hz)	
Lightning impulse current (10/350 $\mu$ s) $I_{imp}$ [L-N/N-PE]	12.5kA/50kA	
Nominal discharge current (8/20 $\mu$ s) $I_n$ (L-N)	25kA/50kA	
Maximum discharge current (8/20 $\mu$ s) $I_{max}$ (L-N)	60kA/100kA	
Voltage protection level $U_P$ (L-N/N-PE)	$\leq 1.5kV/\leq 1.5kV$	
Short-circuit current rating ( $\sim$ ) $I_{SCCR}$	25kA	
Maximum disconnector rating (fuse/MCB)	125A gG/100A	
Temporary overvoltage TOV-withstand $U_T$ (L-N)	400V/5s	
Temporary overvoltage TOV-safe failure $U_T$ (L-N)	520V/120min	
Temporary overvoltage TOV-withstand $U_T$ (N-PE)	1200V/200ms	
Leakage current $I_{PE}$	None	
Response time $t_A$	$\leq 25ns$	
Operating temperature range $T_u$	$-40^\circ C$ to $+80^\circ C$	
Auxiliary Terminal (Remote Signalling)	None	Terminal 11 & 12: Normally Close [NC] Terminal 11 & 14: Normally Open [NO]
Status / Fault indication	Green/Blue: ok; Red: Replace	
Structure type	Modular	
Enclosure	IP20 ; Thermoplastic UL94-V0	

### Dimensions (mm)

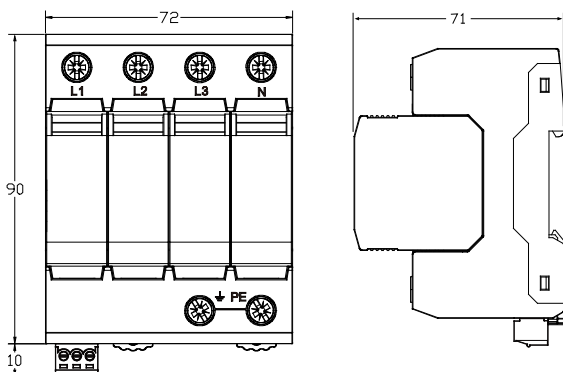

### Schematic

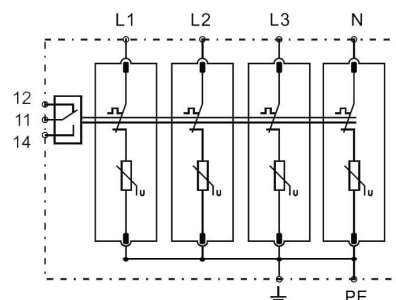

8 Power